

## BSPT Blade Baffles (Straight)



- Patented **XT** Technology allows 300% more wrenching torque.  
Patent #7,159,837
- Same day shipment on custom length baffles.
- Custom stepped width blades, and plug size combinations quoted on request.
- BSPT Brass Plug Baffles for use with other tap drill sizes are available from stock.


Catalog Number	Overall Length (In.)	Plug Size (BSPT)	Tap Drill Diameter	Blade Width (-.005) (-.010)	Blade Thickness	Stock Item
SB18 X 4 BSP	4					•
SB18 X 8 BSP	8	1/8-28	5/16	.312	.057	•
SB18 X 12 BSP	12					•
SB14 X 5 BSP	5					•
SB14 X 10 BSP	10	1/4-19	27/64	.421	.085	•
SB14 X 15 BSP	15					•
SB38 X 6 BSP	6					•
SB38 X 12 BSP	12	3/8-19	9/16	.562	.093	•
SB38 X 18 BSP	18					•
SB12 X 8 BSP	8					•
SB12 X 16 BSP	16	1/2-14	11/16	.687	.093	•
SB34 X 12 BSP	12					•
SB34 X 20 BSP	20	3/4-14	29/32	.906	.093	•
SB1 X 16 BSP	16					•
SB1 X 24 BSP	24	1-11	1 1/8	1.125	.102	•

## BSPT Blade Baffles (Turbo)



- Feature **XT** plugs for 300% more wrench torque.  
Patent #7,159,837

Spiral lengthens the cooling path and keeps baffle centered, providing up to 11% greater flow rate.

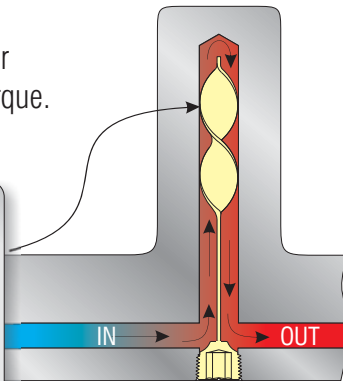

Catalog Number	Overall Length (In.)	Straight Length S	Plug Size (BSPT)	Tap Drill Diameter	Blade Width (-.005) (-.010)	Blade Thickness	Stock Item
TB18 X 4 BSP	4	2					•
TB18 X 8 BSP	8	4	1/8-28	5/16	.312	.057	•
TB18 X 12 BSP	12	6					•
TB14 X 5 BSP	5	2					•
TB14 X 10 BSP	10	4	1/4-19	27/64	.421	.085	•
TB14 X 15 BSP	15	6					•
TB38 X 6 BSP	6	2					•
TB38 X 12 BSP	12	4	3/8-19	9/16	.562	.093	•
TB38 X 18 BSP	18	6					•
TB12 X 8 BSP	8	3					•
TB12 X 16 BSP	16	5	1/2-14	11/16	.687	.093	•
TB34 X 12 BSP	12	4					•
TB34 X 20 BSP	20	6	3/4-14	29/32	.906	.093	•
TB1 X 16 BSP	16	5					•
TB1 X 24 BSP	24	8	1-11	1 1/8	1.125	.102	•